


AMERIGO

*High resolution
nanoparticle size & zeta potential
measurements*

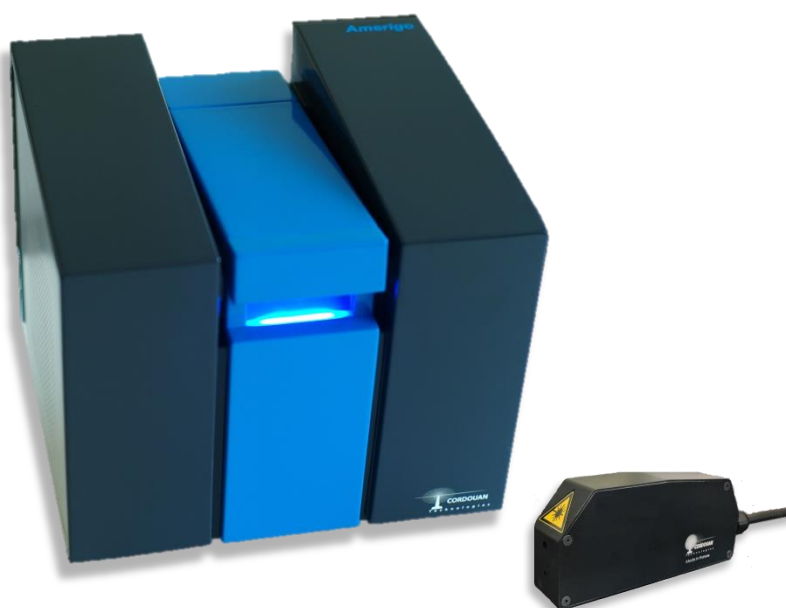

*Explore your nanoparticle suspensions
with one instrument!*

Unique: optical fiber output for an external
in situ contactless probe

IDEAL FOR

Formulation stability
Nanoparticle aggregation
Emulsions dispersion
Pharmaceuticals
Petrochemicals
Polymers
Liposomes and bio-colloids
Pigments and inks
... and more

www.cordouan-tech.com



Enlight the nanoworld


AMERIGO

The three-in-one solution from Cordouan Technologies

1. Particle size
2. Zeta potential
3. Remote measurements

Based on state of the art version of **Dynamic Light Scattering (DLS)** and **Laser Doppler Electrophoresis (LDE)** techniques offering high resolution, accurate and rapid measurement.

- ❑ High quality fibered laser for better precision
- ❑ Fast APD detector
- ❑ Measurements at 170° and 17°
- ❑ Software correlator
- ❑ Advanced and original calculation algorithms

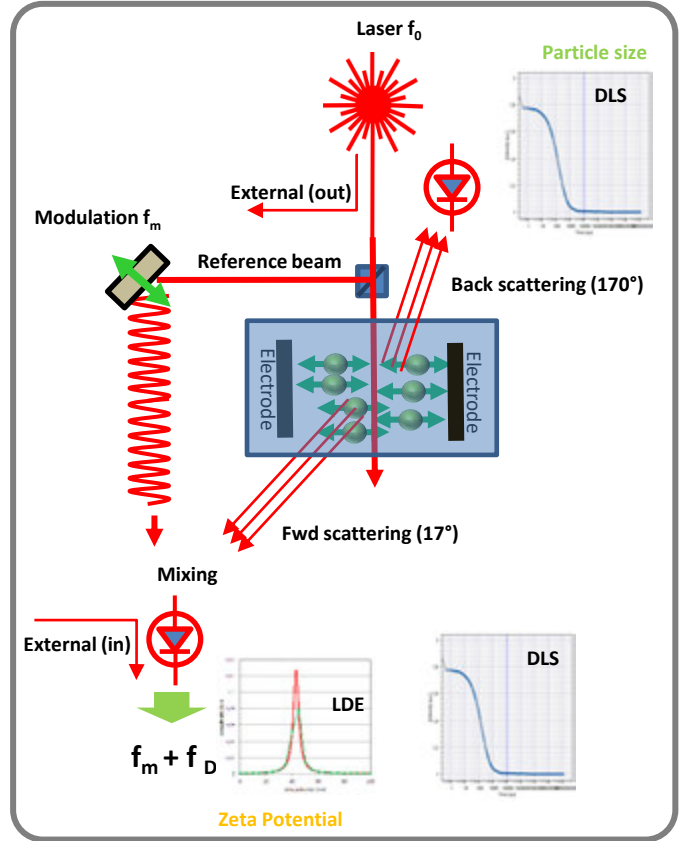

Optical fiber output for remote measurements



In situ remote head for contactless measurements. It can be used in any custom measurements including a limited access and/or harsh environment.



Measurement in a custom container – no batching



In situ monitoring in a double jacket glass reactor



Analysis of injectable vaccine in a prefilled syringe




High concentration remote head based on the patented technology Dual Thickness Controller (DTC) designed for measurements of absorbing or highly concentrated samples.





AMERIGO

AmeriQ Software

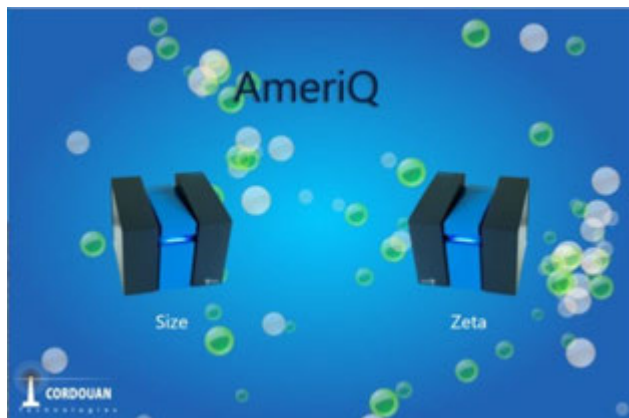

- Original and performant Multimodal Continuous Algorithm (MCA) and Multimodal Discrete Algorithm (MDA)
- Dynamic time slicing
- Kinetics analyses of nanoparticle size
- Post data processing
- Programmable kinetic experiments of zeta potential (zeta vs T° , zeta vs pH, zeta vs time)
- An exhaustive solvent database
- A simulation tool
- User management and programmable SOPs
- CFR21 compliant

A dedicated software **AmeriQ** allows analyzing the nanoparticle size and Zeta potential without any compromise.

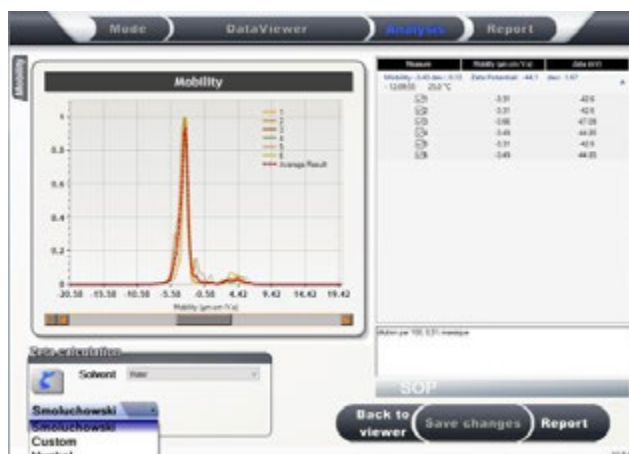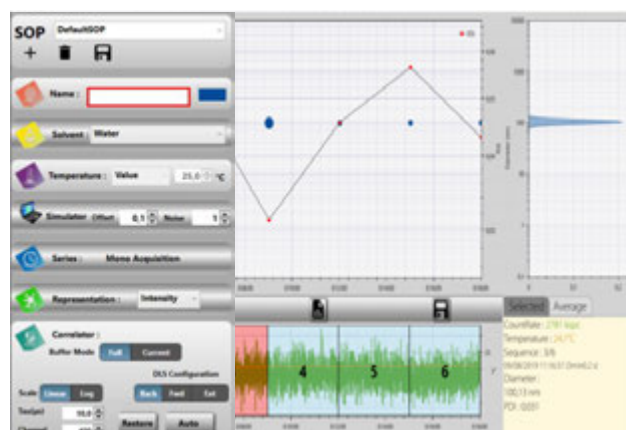


Measurement dip cell



- Innovative oxidation-free vitreous carbon electrodes, easy to clean
- No specific consumables
- Compliant with a standard 10 x 10 mm cuvette
- Available in different materials: quartz, glass or polystyrene, fully compatible with a wide range of solvents
- No artifacts like electro-osmosis effects by suppressing solvent induced displacement along the wall of the cuvette

AMERIGO



Particle size & Zeta potential analyzer

SPECIFICATIONS

Particle size range	Particle size : 0.5 nm up to 10 μm Zeta potential : 1 nm to 100 μm
Sample concentration	0.0001% to 10% w/% (solvent dependent)
Zeta potential range	-500 mV to +500 mV
Temperature control range inside the cell	10°C to 70°C; +/-0,1°C (depending on cuvette cell material)
Mobility range	10^{-10} to 10^{-7} $\text{m}^2/\text{V.s}$
Sample cell	Cuvette cell with optical quality windows compatible with organic solvents
Sample volume	Typically 750 μL (Hellma cell: 10 mm light path)
Sample type	Aqueous & organic solvents; pH: 1-14 (depending on cuvette cell material)
Maximum sample conductivity	300 mS/cm
Optical fiber output (optional)	Possibility to connect an external <i>in situ</i> head or high concentration head



SIGNAL PROCESSING

Measurement technology	Dynamic Light Scattering (DLS) Laser Doppler Electrophoresis (LDE)
Laser source	Highly reliable 50 mW diode @635 nm coupled to automated optical attenuation system. Other wavelengths available upon request.
Measurement angles	Particle size : 170° (backscattering) and 17° Zeta potential: 17°
Data processing algorithm	Real time correlation (DLS) Fast Fourier Transform (Zeta)
Resolution (Zeta)	Mobility = 10^{-10} $\text{m}^2/\text{V.s}$ or Zeta = 0,1 mV (in water)
Detector	Avalanche Photodiode (APD)

HARDWARE

Computer interface	USB 2.0 – Windows 10 32 & 64 bits
Dimensions	33 cm x 33 cm x 38 cm (HWD)
Weight	17 kg
Power supply	100-115/220-240 VAC, 50/60 Hz, 100 W max

SYSTEM COMPLIANCE

CE certification	CE marked product - Class I laser product, EN 60825-1:2001, CDRH
ISO norm	ISO 13321 (1996) & ISO 22412 (2008) compliant, CFR 21 part 11 (option) ISO 13099-2 : 2012 – Colloidal system – methods for zeta-potential determination – Part 2 : Optical methods

Contact:

sales@cordouan-tech.com
service@cordouan-tech.com
11, avenue de Canteranne
33600 Pessac – France
Tel +33 (0)556 158 045
Fax +33 (0)547 747 491

www.cordouan-tech.com



Enlight the nanoworld